

SPIDER 18.95

TRACKED AERIAL WORKING PLATFORMS

EN



PL/TFORM
B A S K E T

RAISING THE STANDARD

Made in Italy







SERIES **SPIDER 18.95**

An optimized outreach for our best seller

- Side outreach of 9.6 m
- Available with Kubota Diesel engine and automatic accelerator or in the version endothermic engine + Lithium-Ion batteries or completely electric with batteries
- 230 kg of loading capacity in the basket
- Radio remote control with DISPLAY as standard equipment
- Versatility and modularity in the choice of accessories

- Diagnostic display in the ground panel and PBT (Platform Basket Telematics)
- Total protection of the chassis with steel covers.
- Supplied with air/water and 230Vac in the basket as standard equipment.
- Interchangeable hydraulic winch with 250 kg of loading capacity as optional accessory.

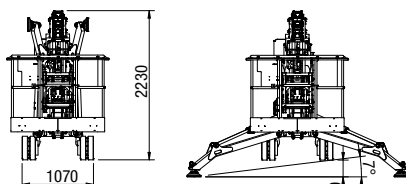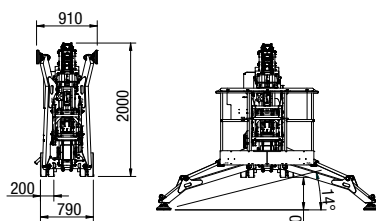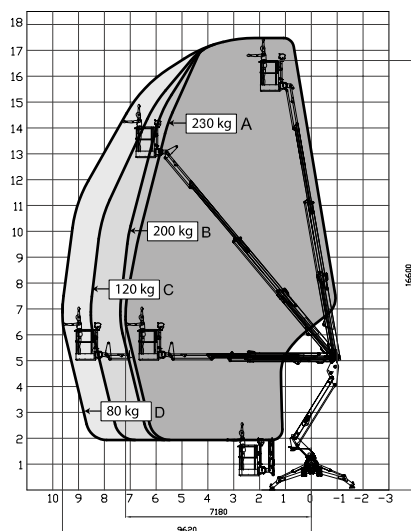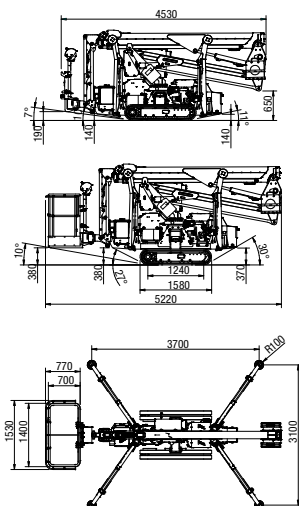

					
TECHNICAL SPECIFICATIONS		STD	E	ED	
Maximum working height	m	17,60			
Floor height	m	15,60			
Maximum side outreach (80kg)	m	9,60			
Maximum side outreach (140kg)	m	8,60			
Rotation angle of the tower	°	360			
Aluminium basket dimensions	m	1,50 x 0,70			
Basket rotation angle	°	90+90			
Maximum capacity of basket	Kg	230			
Length closed (basket disassembled)	m	5,00 (4,36)			
Minimum width closed	mm	780			
Minimum height closed	mm	1990			
Overall dimensions Stabilization	m	3,00 x 3,66			
Maximum horizontal inclination	degrees/%	16° (29%)			
Maximum side inclination	degrees/%	17° (31%)			
Maximum speed	Km/h	1,5/2,5	0,8/1,5	1,5/2,5	
WEIGHTS		STD	E	ED	
Weight in work conditions*	Kg	2.350*	2.500*	2650*	
Ground pressure stowed machine	KN/m²	3,69			
Ground pressure when on stabilizers	KN/m²	2,52			
Max point load on one stabilizer	KN	17,50			
POWER		STD	E	ED	
Honda iGX390 petrol engine	HP/rpm	13/3600	-	13/3600	
Z482 Kubota diesel engine	HP/rpm	13/3200	-	13/3200	
Electric Motor 230Vac/50Hz (110Vac/60Hz)	CV/KW	2,20/3 (1,50/2)	2,20/3 (1,50/2)	2,20/3 (1,50/2)	
Electric Motor 24 Vdc	CV/KW	-	3,5/4,8	3,5/4,8	
Traction battery capacity	24Vdc Lead Acid 24Vdc Lithium Ion	Ah	-	210 300	210 300

* Subject to change depending on configuration.